

Solenoid operated poppet valve


Flange construction

- ◆ 4/3 way
- ◆ $Q_{max} = 40 \text{ l/min}$
- ◆ $p_{max} = 350 \text{ bar}$


DESCRIPTION

Direct operated 4/3-way solenoid poppet valve in flange construction. By means of the pressure tight switching solenoid, the poppet valve spool is opened or closed acting against the spring. Due to the poppet spool construction with pressure compensation on both sides, the flow through the valve is possible in both directions. The seat spool guide is sealed by means of an O-ring. The metallic sealing seat closes the valve virtually leak free.

SYMBOL



NG6
ISO 4401-03



APPLICATION

Poppet valves are used where tight closing functions of the valve are essential like leakage-free load holding, clamping or gripping.

COMMISSIONING

Attention! When commissioning, the valve must be vented under pressure (max. two rotations of screw E).



TYPE CODE

4/3 way execution

A 4 3 06 - - #

International standard interface ISO

Solenoid, Medium

M

Solenoid, Super

S

4-way (connections)

3 switching positions

Nominal size 6

Nominal voltage U_N

12 VDC

G12

115 VAC

R115

24 VDC

G24

230 VAC

R230

Sealing material

NBR

FKM (Viton)

D1

Design index (subject to change)

1.11-2150

GENERAL SPECIFICATIONS

Designation	4/3-way poppet valve
Construction	Direct operated
Mounting	Flange construction
Nominal size	NG6 according to ISO 4401-03
Actuation	Switching solenoid
Ambient temperature	-25...+70 °C (NBR) -20...+70 °C (FKM)
Weight	5,4 kg
MTTFd	150 years

ACTUATION

Actuation	Switching solenoid, wet pin push type, pressure tight
Execution	Medium: SIN45DV (Data sheet 1.1-122) Super: SIS45DV (Data sheet 1.1-127)
Connection	Connector socket EN 175301 – 803

ELECTRICAL SPECIFICATIONS

Protection class	IP65
Relative duty factor	100 % DF
Switching frequency	15'000 / h
Service life time	10 ⁷ (number of switching cycles, theoretically)
Voltage tolerance	± 10 % with regard to nominal voltage
Standard nominal voltage	12 VDC, 24VDC, 115 VAC, 230 VAC AC = 50 to 60 Hz, rectifier integrated in the connector socket

Note! Other electrical specifications see data sheet 1.1-122 (Medium) and 1.1-127 (Super)






HYDRAULIC SPECIFICATIONS

Working pressure	Medium: $p_{max} = 160$ bar Super: $p_{max} = 350$ bar
Maximum volume flow	$Q_{max} = 40$ l/min, see characteristic
Volume flow direction	Any (see characteristic)
Leakage oil	Seat tight, max. 0,05 ml / min (approx. 1 drop / min) at 30 cSt
Fluid	Mineral oil, other fluid on request
Viscosity range	12 mm ² /s...320 mm ² /s
Temperature range fluid	-20...+70 °C
Contamination efficiency	Class 20 / 18 / 14
Filtration	Required filtration grade $\beta_{10...16} \geq 75$, see data sheet 1.0-50

PERFORMANCE SPECIFICATIONS

Oil viscosity $\nu = 30$ mm²/s

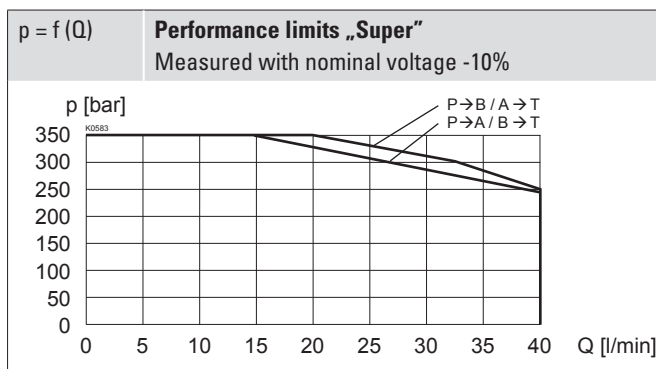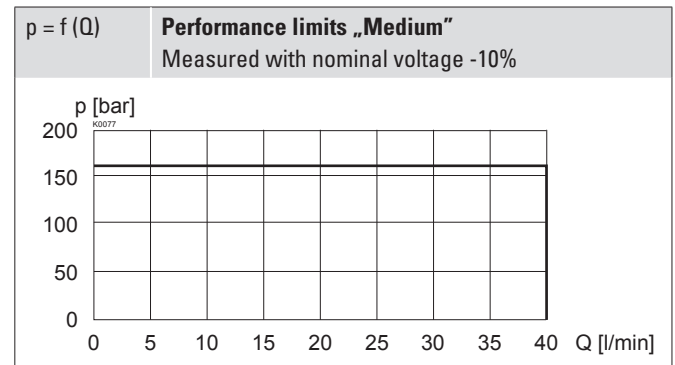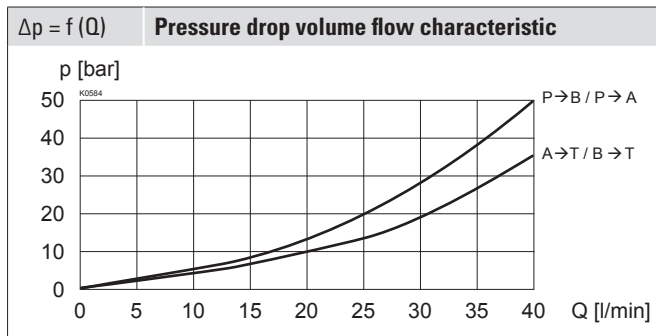

Attention! Long periods of non-actuation can reduce the switching performance



INSTALLATION NOTES

Mounting type	Flange mounting 4 fixing holes for socket head screws M5 x90
Mounting position	Any, preferably horizontal
Tightening torque	Fixing screws $M_0 = 9,7$ Nm (quality 12.9, zinc coated)

Note! The length of the fixing screw depends on the base material of the connection element.



STANDARDS


Mounting interface	ISO 4401-03
Solenoids	DIN VDE 0580
Connection execution D	EN 175301 – 803
Protection class	EN 60 529
Contamination efficiency	ISO 4406

VALVES INSTALLED

The central functioning element is the poppet valve cartridge NG6, data sheet 1.11-2030.


DIMENSIONS

4/3-way

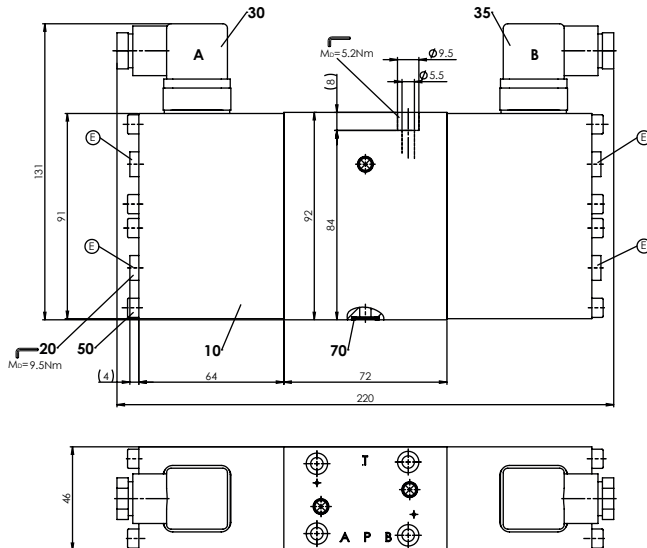

E = Air bleed screw

HYDRAULIC CONNECTION

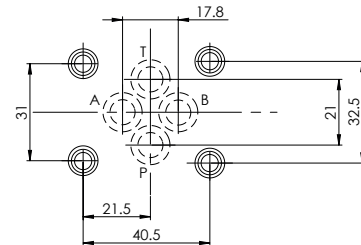

PARTS LIST

Position	Article	Description
10	260.64..	Solenoid SIN45DV-...-M40-HB0
	260.74..	Solenoid SIS45DV-...-M40-HB0
30	219.2001	Electric plug A (grey)
35	219.2002	Electric plug B (black)
50	246.2171	Socket head screw M5 x 70 DIN 912
70	160.2093	O-ring ID 9,25 x 1,78 (NBR)
	160.6092	O-ring ID 9,25 x 1,78 (FKM)

ACCESSORIES

Fixing screws	Data sheet 1.0-60
Threaded subplates	Data sheet 2.9-05
Multi-station subplates	Data sheet 2.9-45
Horizontal mounting blocks	Data sheet 2.9-85
Technical explanations	Data sheet 1.0-100
Hydraulic fluids	Data sheet 1.0-50
Filtration	Data sheet 1.0-50
Relative duty factor	Data sheet 1.1-430

SURFACE TREATMENT

- ◆ The valve body is painted with a two component paint
- ◆ The solenoid is zinc coated
- ◆ The screws are zinc coated

SEALING MATERIAL

NBR or FKM (Viton) as standard, choice in the type code