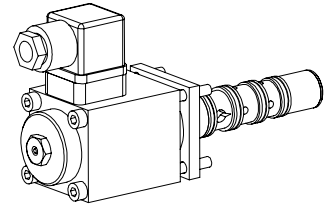


**Proportional 3-way flow control valve
Slip-in cartridge**

- Direct operated, pressure compensated
- $Q_{max} = 22 \text{ l/min}$, $p_{max} = 250 \text{ bar}$
- $Q_{Nmax} = 20 \text{ l/min}$

NG6
 Wandfluh standard

DESCRIPTION

Direct operated, pressure compensated proportional flow regulating valve, cavity acc. to Wandfluh-Norm. Three flow ranges are available. The volume flow is adjusted by a proportional solenoid (VDE standard 0580). A progressive increase in volume flow and reduced hysteresis are characteristic of this valve. The cartridge body is made from steel. The outside parts and the solenoid are zinc coated.

FUNCTION

The 3-way flow control valve is designed to keep the oil flow to any actuator constant irrespective of the load. Surplus volume flow will be diverted to the tank line thus saving energy and preventing an overheating of the hydraulic system. The force controlled proportional solenoid running in the fluid acts directly on the control spool which opens the triangular shaped throttling notches in the cartridge body. The throttle opening, and therefore the flow volume changes proportionally to the current absorption of the proportional solenoid. When the solenoid is without current, the control spool is held in the closed position by a spring. To control the valve proportional amplifiers are available from Wandfluh (see register 1.13).

APPLICATION

Proportional flow control valves are suitable for precise feed control systems where the supply volume flow needs to be kept constant even when the load fluctuates. The slip-in cartridge is very suitable for mounting in control blocks and is built into the Wandfluh hydraulics NG 6 as a functional element in sandwich style plates and flange-mounted valves (please refer to the separate data sheets in register 2.6).

CONTENT

GENERAL SPECIFICATIONS	1
HYDRAULIC SPECIFICATIONS	1
ELECTRICAL SPECIFICATIONS	1
SYMBOLS	2
CHARACTERISTICS	2
DIMENSIONS/ SECTIONAL DRAWINGS	2
PARTS LIST	2
ACCESSORIES	2

TYPE CODE

EMR603 - <input type="text"/> - <input type="text"/> # <input type="text"/>	
3-way flow control valve	
Nominal volume flow rates:	
$Q_N = 6,3 \text{ l/min}$	<input type="text" value="6,3"/>
$Q_N = 12,5 \text{ l/min}$	<input type="text" value="12,5"/>
$Q_N = 20 \text{ l/min}$	<input type="text" value="20"/>
Standard nominal voltage:	
$U_N = 12 \text{ VDC}$	<input type="text" value="G12"/>
$U_N = 24 \text{ VDC}$	<input type="text" value="G24"/>
Design-Index (Subject to change)	

GENERAL SPECIFICATIONS

Description	3-way flow control valve
Construction	Slip-in cartridge for cavity acc. to Wandfluh standard
Operations	Proportional solenoid
Mounting	Slip-in, 4 Cylinder screws M5
Ambient temperature	-20...50°C
Mounting position	any
Fastening torque	$M_D = 8,4 \text{ Nm}$ (Qual. 12.9) for fastening screws
Weight	$m = 1,1 \text{ kg}$

HYDRAULIC SPECIFICATIONS


Fluid	Mineral oil, other fluid on request
Contamination efficiency	ISO 4406:1999, class 18/16/13 (Required filtration grade $\beta_{6...10} \geq 75$) see data sheet 1.0-50/2
Viscosity range	12 mm ² /s...320 mm ² /s
Fluid temperature	-20...+70°C
Peak pressure	$p_{max} = 250 \text{ bar}$
Nominal volume flow rates	$Q_N = 6,3 \text{ l/min}$, $Q_N = 12,5 \text{ l/min}$, $Q_N = 20 \text{ l/min}$
Max. Volume flow	$Q_{max} = 22 \text{ l/min}$
Min. Volume flow	$Q_{min} = 0,02 \text{ l/min}$
Leakage volume flow	see characteristics
Resolution	1 mA
Repeatability	≤ 1 % *
Hysteresis	≤ 3 % *
	* at optimal dither signal

ELECTRICAL SPECIFICATIONS


Construction	Proportional solenoid, wet pin push type, pressure tight	
Standard-nominal voltage	$U = 12 \text{ VDC}$	$U = 24 \text{ VDC}$
Limiting current	$I_G = 1780 \text{ mA}$	$I_G = 810 \text{ mA}$
Relative duty factor	100% ED (see data sheet 1.1-430)	
Protection class	IP 65 to EN 60 529	
Connection/Power supply	Over device plug connection to ISO 4400/DIN 43650 (2P+E)	
Other electrical specifications	see data sheet 1.1-130 (PI45V)	

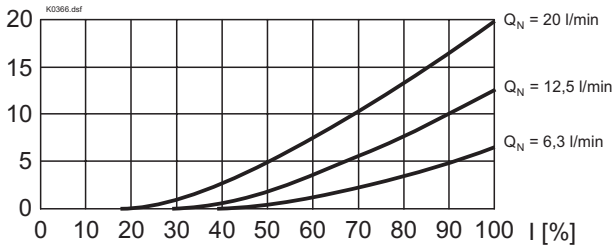
SYMBOLS

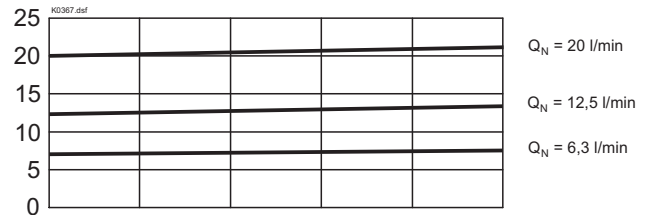
simplified

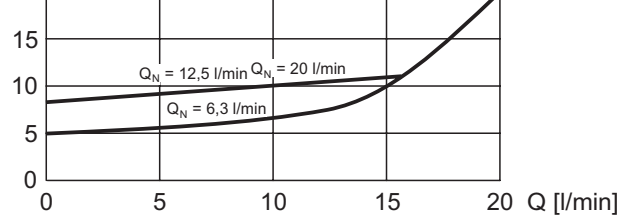
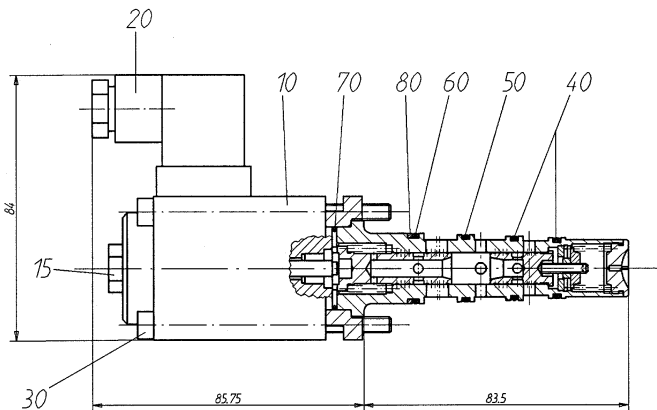


detailed

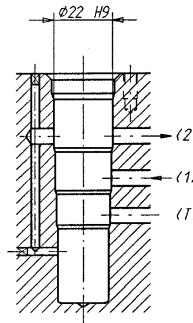

CHARACTERISTICS Oil viscosity $\nu = 30\text{mm}^2/\text{s}$
 $Q = f(l)$ Volume flow adjustment characteristics

 Q [l/min]

 $Q = f(p)$ Volume flow pressure characteristics

 Q [l/min]

 $\Delta p = f(Q)$ Pressure drop volume flow characteristics, over pressure compensator

 Δp [bar]

DIMENSION/SECTIONAL DRAWING


Cavity drawing acc. to Wandfluh standard



For detailed cavity drawing and cavity tools, see data sheet 2.13-1031

PARTS LIST

Position	Article	Description
10	256.4454 256.4418	Proportional solenoid PI45V-G24 Proportional solenoid PI45V-G12
15	253.8001	Locking screw with integrated manual override HB6
20	219.2002	Plug (black)
30	246.2176	Cylinder screw M5x75 DIN 912
40	160.2156	O-ring ID 15,6x1,78
50	160.2170	O-ring ID 17,17x1,78
60	160.2188	O-ring ID 18,77x1,78
70	160.2236	O-ring ID 23,52x1,78
80	49.3226	Back up ring RD 19,1x22x1,4

ACCESSORIES

Proportional amplifier

Register 1.13

Technical explanation see data sheet 1.0-100E