


## Threaded subplate stainless

### Installation in pipes

- ◆  $p_{max} = 350 \text{ bar}$
- ◆ Connections G3/8"


**NG6**  
**ISO 4401-03**



## DESCRIPTION

Threaded subplate with mounting interface for vertical stacking and threaded connection of the connections A, B, P, T. The stainless execution is especially suitable for the use in wet and salty environment.

## SYMBOL



## TYPE CODE

International standard interface ISO	A G 6 S - K9 #
Threaded subplate	
Nominal size 6	
Type list Connections A, B, P, T on the side	
Stainless	
Design index (subject to change) 2.9-30S	

## GENERAL SPECIFICATIONS


Designation	Threaded subplate
Mounting	Installation in pipes
Nominal size	NG6 according to ISO 4401-03
Weight	1,0 kg

## INSTALLATION NOTES


Mounting type	4 fixing holes for M5
Mounting position	Any
Threaded connections	G3/8" in A, B, P, T

## DIMENSIONS

AG6S-K9

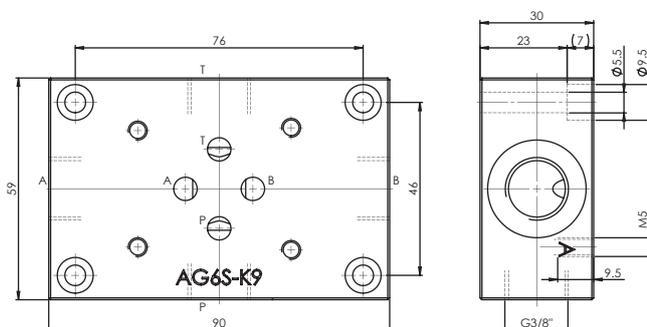

## HYDRAULIC CONNECTION

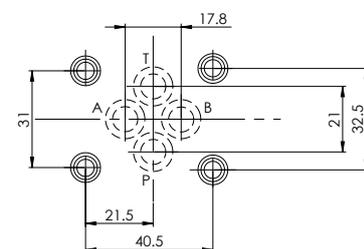

## SURFACE TREATMENT

- ◆ The plates are made of stainless steel

**Wandfluh AG** Postfach CH-3714 Frutigen  
 Tel. +41 33 672 72 72 Fax +41 33 672 72 12 sales@wandfluh.com